




S.C.P. s.a.

Suministros de Conectores
Profesionales, s.a.

M2275934

M22759

SAE AS22759/34

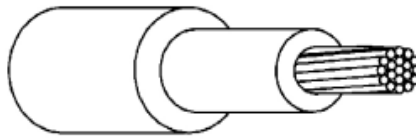

M22759/34 is a normal weight, high temperature airframe and avionics wire insulated with a dual layer of cross-linked, modified ethylene-tetrafluoroethylene (ETFE). The dual insulation provides superior cut-through and abrasion resistance making it ideal for use in Mil-Spec and Aerospace applications. Sizes 2 and larger have a dark green, aromatic polyimide braid with a color code designator of 5D.

Conductor: Tin Plated Copper
Insulation: Cross-linked modified ETFE
Temp. Rating: 150° C
Voltage Rating: 600 Volts R.M.S.
M27500 Type: SD

Mil-Spec Part	AWG	Stranding	Ohms/1000ft	Min	Max	(lbs/1000ft)
M22759/34-24-*	24	19X36	26.2	0.043	0.047	2.30
M22759/34-22-*	22	19X34	16.2	0.048	0.052	3.20
M22759/34-20-*	20	19X32	9.88	0.056	0.060	4.70
M22759/34-18-*	18	19X30	6.23	0.067	0.073	7.20
M22759/34-16-*	16	19X29	4.81	0.074	0.080	9.00
M22759/34-14-*	14	19X27	3.06	0.091	0.097	13.8
M22759/34-12-*	12	37X28	2.02	0.108	0.114	20.5
M22759/34-10-*	10	37X26	1.26	0.130	0.138	32.4
M22759/34-8-*	8	133X29	0.701	0.187	0.203	60.3
M22759/34-6-*	6	133X27	0.445	0.231	0.251	94.5
M22759/34-4-*	4	133X25	0.280	0.300	0.320	150
M22759/34-2-*	2	665X30	0.183	0.389	0.421	239
M22759/34-1-*	1	817X30	0.149	0.429	0.461	290
M22759/34-1/0-*	1/0	1045X30	0.116	0.469	0.501	377
M22759/34-2/0-*	2/0	1330X30	0.091	0.529	0.561	487

Tel.: +34 91 355 60 06
e-mail: comercial@scp-sa.es