




S.C.P. s.a.

Suministros de Conectores Profesionales, s.a.

1206-30-9

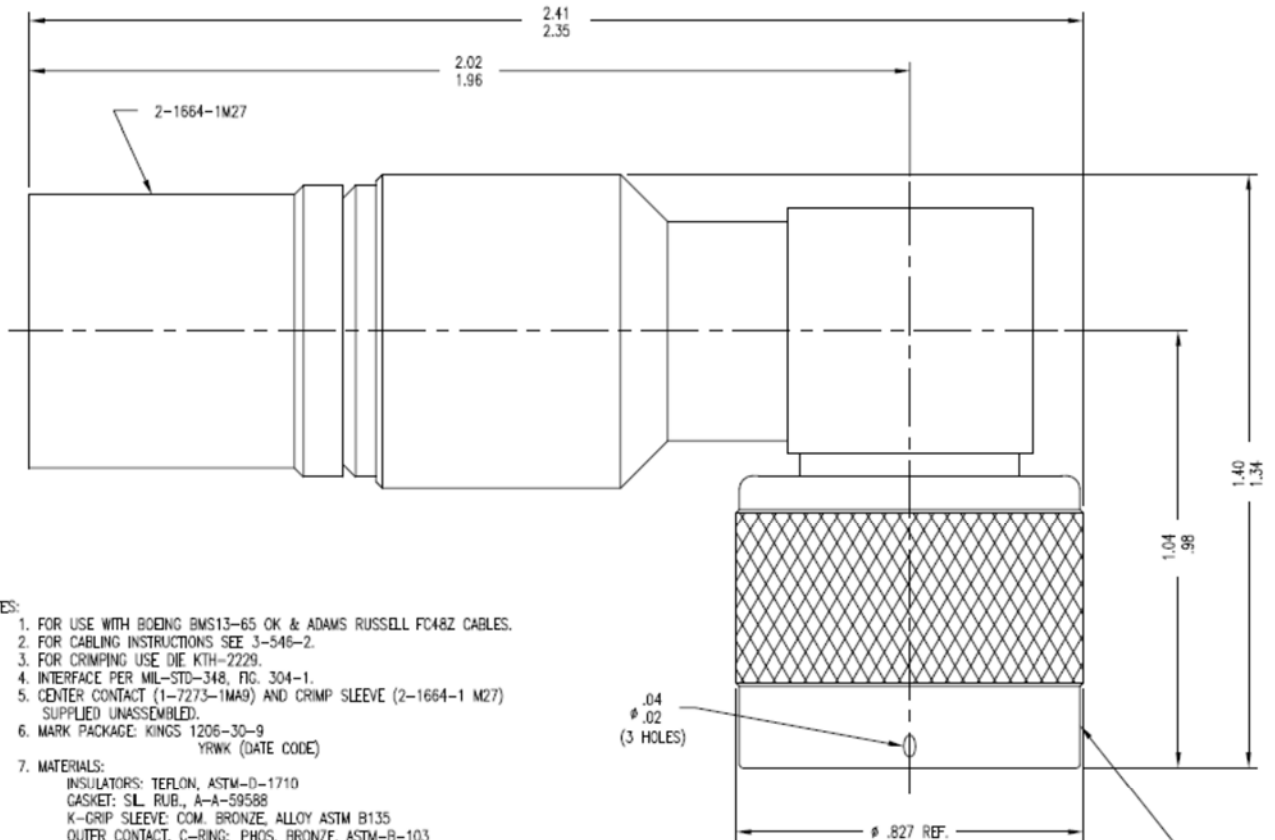

NOTES:

1. FOR USE WITH BOEING BMS13-65 OK & ADAMS RUSSELL FC48Z CABLES.
2. FOR CABLING INSTRUCTIONS SEE 3-546-2.
3. FOR CRIMPING USE DIE KTH-2229.
4. INTERFACE PER MIL-STD-348, FIG. 304-1.
5. CENTER CONTACT (1-7273-1MA9) AND CRIMP SLEEVE (2-1664-1 M27) SUPPLIED UNASSEMBLED.
6. MARK PACKAGE: KINGS 1206-30-9
YRWK (DATE CODE)
7. MATERIALS:
INSULATORS: TEFLON, ASTM-D-1710
GASKET: SL. RUB., A-A-59588
K-GRIP SLEEVE: COM. BRONZE, ALLOY ASTM B135
OUTER CONTACT, C-RING: PHOS. BRONZE, ASTM-B-103
CRIMP CONTACT F. BER. COP., ASTM-B-196
ALL OTHER PARTS: BRASS, ASTM-B16
8. FINISHES:
CONTACTS: .000050 MIN GOLD PLATE, PER ASTM-B-488 OVER .000050 MIN NICKEL PER AMS-QQ-N-290 (RoHS)
OUTER CONTACT: .000200 MIN SILVER PER ASTM-B-700 OVER .000020 MIN COPPER PER ASTM B734 (RoHS)
ALL OTHER METAL PARTS: .000050 MIN NICKEL PER AMS-QQ-N-290 OVER .000050 MIN COPPER PER ASTM B734 (RoHS)
9. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 1000 VRMS
FREQUENCY RANGE: DC TO 11 GHz
10. WEIGHT: 81.4 GRAMS

.04
Ø .02
(3 HOLES)

Ø .827 REF.

MARK: KINGS 1206-30-9
YRWK (DATE CODE)

Tel.: +34 91 355 60 06
e-mail: comercial@scp-sa.es