


182734-3

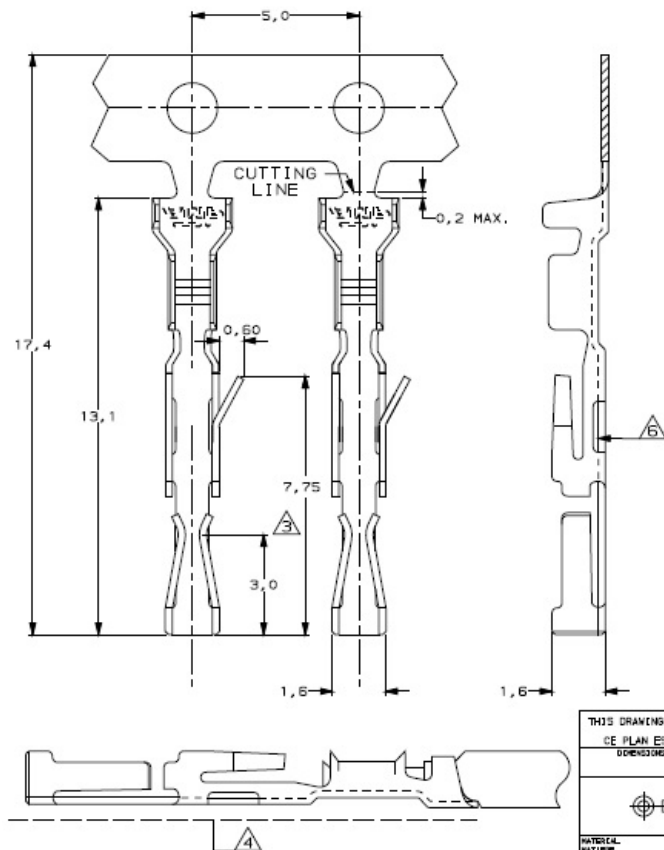

LOG	DEST	7	REVISIONS			
F	E	F	DESCRIPTION	DATE	DESIGN	APP.
			E	REVISED	22-NOV-04	JD
			F	UPDATED FINISH	29-MAR-08	JJD

NOTES:

- △ CONTACT MATERIAL: PHOSPHORBRONZE
- △ PLATING: UNDERCOATING 1,3 µm Ni OVERALL
AT CONTACTPLACE 0,8µm Au
AT CRIMPBARRELS 2,5µm Sn
- △ CONTACT POINT
- △ BOTTOM OF CONTACT TO BE STRAIGHT
AFTER CRIMPING OF WIRE
- 5 WIRE RANGE: 0,08-0,22mm²
- INSULATION RANGE: 0,80-1,50 DIA.
- △ OPTIONAL
- 7 THE CONTACT MEETS THE REQUIREMENT OF
INTERNATIONAL STANDARD IEC 603-8

LOOSE PIECE	△	△	182734-3
STRIP	△	△	188746-1
CONFIGURATION	FINISH	MATERIAL	PARTNUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT. CE PLAN EST UN DOCUMENT CONTRÔLÉ. DESIGNER: J.J. DESPREZ 22-NOV-04 REVIEWER: T. CORRIOL APPROVED: Y. PETRONIN PRODUCT SPEC: PRODUCT APPLICATION SPEC: APPLICATION MATERIAL: FINISH: FINITION THE 1302 CONNECTOR (GOLD VERSION) CRIMP CONTACT (AWG 28-24) SIZE: A3 CODE: 00779 DRAWING NO: 188746			