

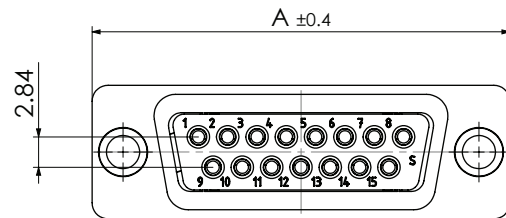
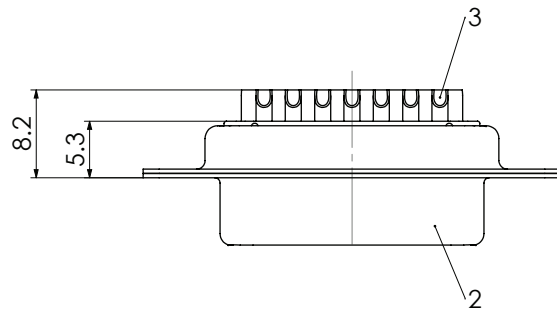


COMMENTS:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS,
AND IT ALSO MAY NOT BE IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.

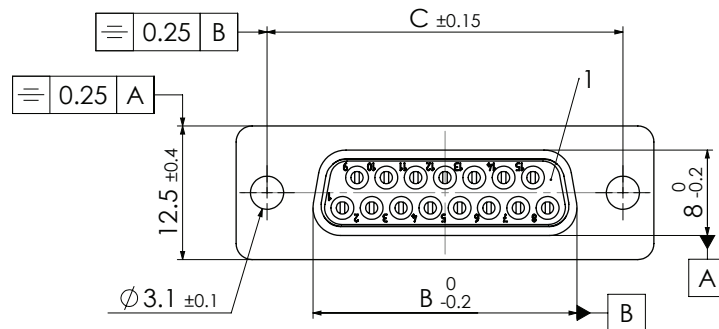

Fxx*₁)S0Gy*₂)
e.g. F09S0G1

*₁) xx No. of contacts 09, 15, 25 or 37
*₂) y for performance classes 1, 2 or 3
(contact cycle for G1/G2/G3 = 500/200/50)

xx	A [mm]	B [mm]	C [mm]
09	30.8	16.4	25
15	39.1	24.7	33.3
25	53	38.5	47.04
37	69.3	54.9	63.5

RoHS compliant

3	xx	Signal contact	S0 / Brass	AWG 20 / G1/G2/G3
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C - +125°C)	white
No.	St.	Part	Type Description/Material	Surface plating/Colour/Class

			ISO 2768-m	SCALE 2:1	TITLE
			NAME / DATE		
		DRAWN	Denzinger		
		CHECKED	flobmann		
			08-10-2002		
			08-10-2002		

Grupo	S.C.P. s.a.	SINTERSA	DWG.NO.	FxxS0Gy	REV.
	Suministros de Conectores Profesionales, s.a.	Sistemas de Interconexión s.a.			1
			REPLACEMENT FOR:	FxxS0Gy a	PAGES 1

Grupo



S.C.P. s.a.
Suministros de Conectores
Profesionales, s.a.



SINTERSA
Sistemas de Interconexión, s.a.

Marqués de Monteagudo, 24

28028 Madrid - España

Tel.: +34 91 361 00 41

Fax: +34 91 725 17 45

e-mail: comercial@sintersa.es

www.scp-sa.es | www.sintersa.es