



SCP TV


**S.C.P. s.a.**Suministros de Conectores
Profesionales, s.a.

COMPOSITE SHELLS

SQUARE FLANGE RECEPTACLES

SCP CTVP00RW JD38999/20J**SCP CTVPS00RF JD38999/20M**

Square flange receptacle

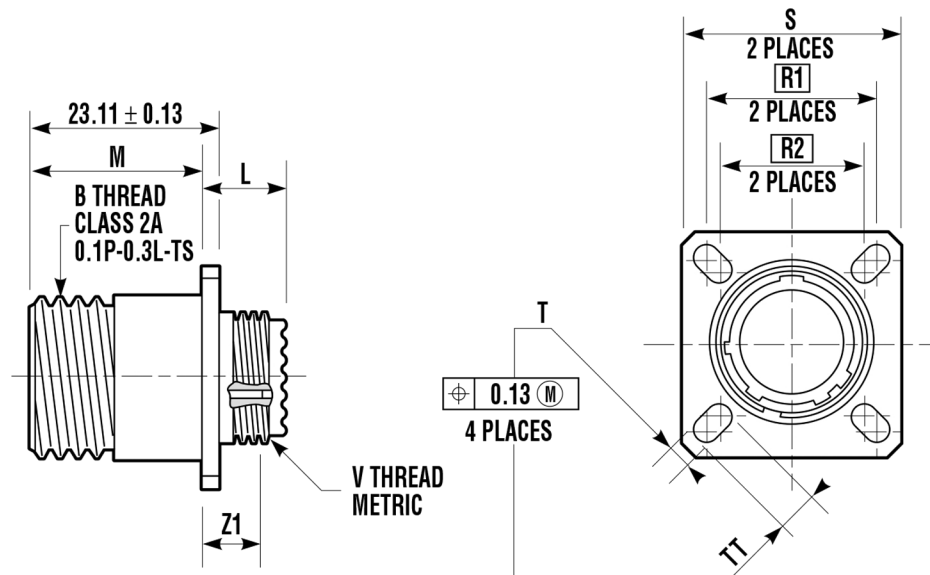

Shell size		B	L	M	R1	R2	S	T	Z1	TT	V thread
MIL-DTL-38999 Series III	SCP CTV	Thread (inches)	Max (mm)	+0.00 -0.13 (mm)	(mm)	(mm)	± 0.25 (mm)	+0.20 -0.13 (mm)	Max (mm)	+0.20 -0.13 (mm)	metric
A	9	.6250	13.055	19.685	18.26	15.09	23.83	3.25	5.03	5.49	M12x1-6g
B	11	.7500	13.055	19.685	20.62	18.26	26.19	3.25	5.03	4.93	M15x1-6g
C	13	.8750	13.055	19.685	23.01	20.62	28.58	3.25	5.03	4.93	M18x1-6g
D	15	1.0000	13.055	19.685	24.61	23.01	30.96	3.25	5.03	4.39	M22x1-6g
E	17	1.1875	13.055	19.685	26.97	24.61	33.32	3.25	5.03	4.93	M25x1-6g
F	19	1.2500	13.055	19.685	29.36	26.97	36.53	3.25	5.03	4.93	M28x1-6g
G	21	1.3750	13.843	18.923	31.75	29.36	39.67	3.25	5.79	4.93	M31x1-6g
H	23	1.5000	13.843	18.923	34.93	31.75	42.88	3.91	5.79	6.15	M34x1-6g
J	25	1.6250	13.843	18.923	38.10	34.93	46.02	3.91	5.79	6.15	M37x1-6g

For panel drilling, refer to page 23

For PCB contacts stickout, refer to page 22

Maximum panel thickness for rear panel mounting:

5,94mm from size 9 to 19

5,18mm from size 21 to 25



Marqués de Monteagudo, 24

28028 Madrid - España

Tel.: +34 91 361 00 41

Fax: +34 91 725 17 45

e-mail: comercial@sintersa.es

www.scp-sa.es | www.sintersa.es